


VR 600X900 1 rete



IMEC S.r.l.
via Umberto Degola, 24
42124 - Reggio Emilia
ITALIA

tel. +39.0522.517492
fax +39.0522.920268
info@i-mec.it
bitecnology.com

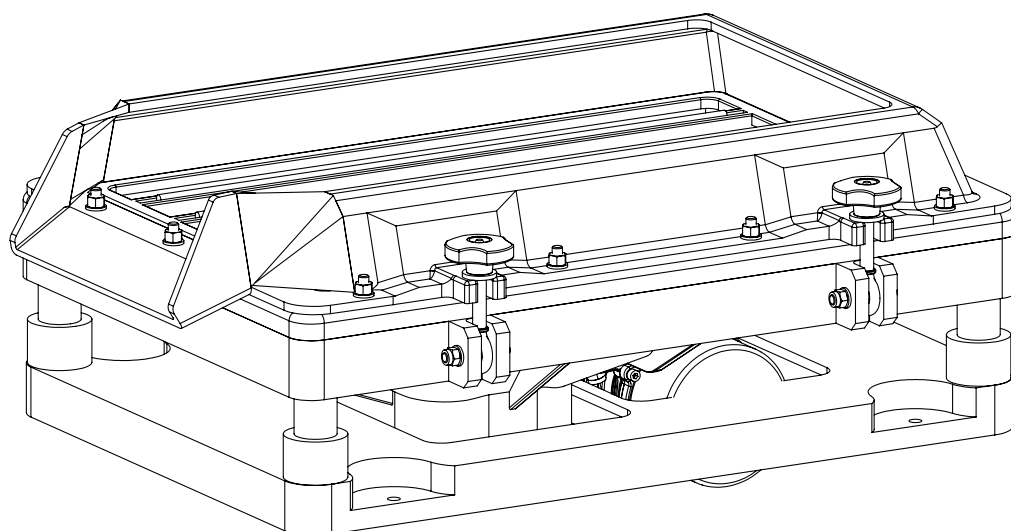

V 0024



V.R. 600X900 /1 RETE

Setaccio rettangolare costruito in fusione di alluminio/antimonio.
Con bocca di scarico scarto aperta frontalmente.
Disponibile con motovibratori standard o ad alta frequenza di vibrazione.

Applicazioni:

Nelle ceramiche

All'uscita del mulino continuo in funzione di sghiaiatore.

Sotto l'atomizzatore come controllo primario.

Nell'industria di produzione stoviglie e sanitari. all'uscita dei turbo-dissolutori e degli scioglitori.

Nelle depurazione delle acque residuali dal taglio di marmo, vetro e ceramica.

Ovunque sia necessaria setacciatura grossolana di controllo.

Vantaggi:

La bocca di scarico superiore permette la rapida uscita di parti di grandi dimensioni.

L'ingombro ridotto in altezza ne permette il posizionamento in spazi ristretti.

La costruzione del telaio porta-rete antisfondamento..

Optional:

Reti in poliuretano.

Motovibratore con avvolgimento in immerso in resina sottovuoto.

Deferrizzatori.

Versioni a doppia o a tripla rete vagliante.

Carrello o basamento.

V.R. 600X900/1 MESH

Rectangular sieve built in cast aluminum/antimony.
With front opening discharge mouth.
Available with standard or high vibrating frequency motor-vibrators.

Applications:

In the ceramic industry:

At the continuous mills' drainage functioning as a gravel remover

Under the atomizer as primary controller

In the crockery and health production, at the exit of the turbo-dissolvers and dissolvers

In the depuration of the residual waters from marble cutting, glass, and ceramic.

Anywhere the check through coarse sifting is needed

Advantages:

The upper loading mouth allows the rapid removal of large parts

Its small height allows for positioning in small spaces

Shatterproof built mesh holding frame




Options:

Polyurethane meshes

Iron removers

Double and triple screening mesh

Cart or base

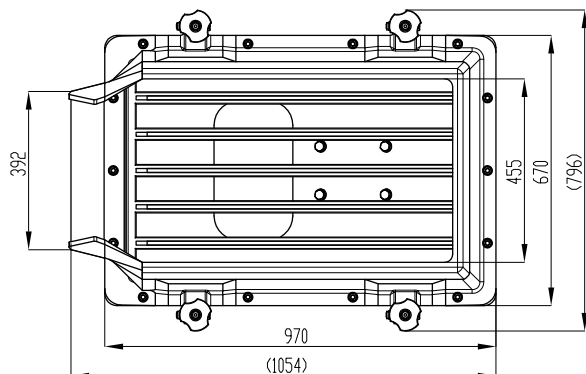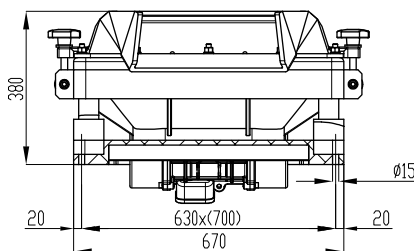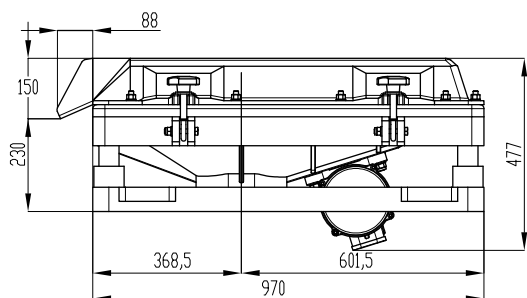

Technical features

	VR 600x900/1 PVN 125/2/800	VR 600x900/1 PVN 125/4/300
Electric Power (KW)	0,67	0,40
Centrifugal force (Kg)	800	300
Number of screening	1	1
Screening surface (m ²)	0,54	0,54
RPM	3000	1500
Weight (Kg)	129	133
Material	Aluminium antimony	Aluminium antimony